


THERESA AXFORD
Superintendent of Schools

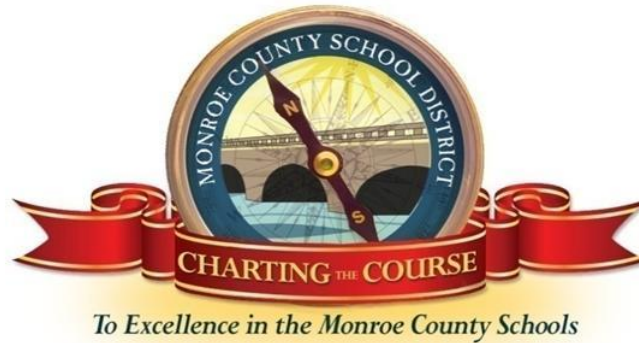

Members of the Board

District # 1
BOBBY HIGHSMITH

District # 2
ANDY GRIFFITHS
Vice-Chairman

District # 3
MINDY CONN

District #4
JOHN DICK
Chairman

District # 5
DR. SUE WOLTANSKI

Bid No: ITB 2022001
Name of Bid: AC Repairs and Replacements
Post Date: 2/11/2022
Notice Post Time: 4:00 PM

Addendum No.1

Section III. 2 contains the following changes:

Coral Shores High School

- Delete *'and isolation dampers'* from section d. i. on page 8.

Marathon High School

- Add unit CRAC 6.1 to the list of units for replacement in section b. on page 8.

Sugarloaf School

- Replace section a. iv. on page 8 with the following:
 - *'Building 1 OAU 15 outside air unit. Model number 38APD0606HA22020, Serial number 4015054954.'*
- Delete section b on page 9.

Poinciana School

- Replace section a. on page 9 with *'Replace condensing unit coils in the following Carrier condensing units.'*

Key West High School

- Replace section a. on page 9 with *'Replace condensing unit coils in the following Carrier condensing units.'*

Add the following to section III. 5. e (additions in red):

- Condenser coil replacements. *'When coils are removed for replacement all rust shall be removed on the support frame by wire brush. Recoat with cold galvanizing spray. In any area where metal thickness is reduced by more than half by the cleaning process, reinforce existing frame with galvanized L channel epoxied and screwed to the damaged frame. L channel shall be similar in thickness to the existing frame and shall have legs as wide as the top of the damaged frame.'* These components are to be installed in a neat and workmanship type manner. Since replacement components are OEM drop in replacements a like new installation is expected. Field adaptations may not be accepted and must be cleared by the Director of Maintenance in writing. Systems shall be pressure tested and evacuated under the vacuum prior to charging with refrigerant. This contractor shall perform all work needed for these units to be returned to normal operation after new components are installed.

The following was requested during the Q&A period and is being added to the bid documents:

- Coral Shore High - GYM AHU 3912- please provide schedule of existing unit performance requirements.

New Document Added:

ITB 2022001_Coral Shores High School Original Mechanical Schedule Drawing