


THERESA AXFORD
Superintendent of Schools

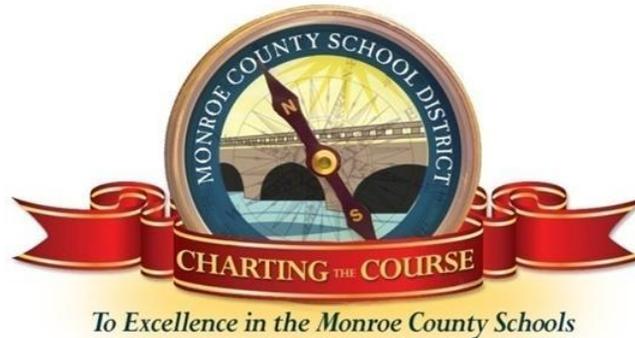

Members of the Board

District # 1
BOBBY HIGHSMITH

District # 2
ANDY GRIFFITHS
Vice-Chairman

District # 3
MINDY CONN

District #4
JOHN DICK
Chairman

District # 5
DR. SUE WOLTANSKI

Bid No: ITB 2022013

Name of Bid: Cosmetology Alterations at Coral Shores High School

Post Date: 5/6/2022

Notice Post Time: 1:30 p.m.

Q&A Response No: 2

Q1. Please provide an overall plan that shows the distance and/or proposed route for 2” conduit from New Panel LF3 and Existing Panel MDP1. If routing is contractor option, please provide overall plan. The two areas are on different floors and quite some distance apart.

A1. This panel is being deleted and circuits will be fed from LF2 and CF2. Updated drawings to follow.

Q2. There does not appear to be room to install a new LF3 Panel as shown. There is an existing data panel in the location shown for the new LF3 panel. Please provide direction on where to install new LF3 panel. Photos of Electric Room 293 attached.

A2. This panel is being deleted and circuits will be fed from LF2 and CF2. Updated drawings to follow.

Q3. What is to be done with existing ducted stove exhaust hood and Chase/ducting.

A3. In the District Bid Specification see note III.5.1.i

Existing kitchen hood and chase shall be removed to above the drop ceiling line. Repair the drop ceiling where the chase was removed and make it continuous to the wall. Patch and paint the wall to match the existing. Leave existing ductwork to outside for future room exhaust fan. Duct tape over the opening to temporarily seal the duct.

Q4. Please confirm VCT is existing under existing cabinets and there is no VCT work required.

A4. Initial investigation spot checks showed VTC to be continuous. If required the district will make repairs to VCT under the existing cabinets if it does not exist.